


# RLC-206-UNI

Alarmed Six Beacon  
Red Light Controller

WHERE ENGINEERING  
MEETS PASSION.™

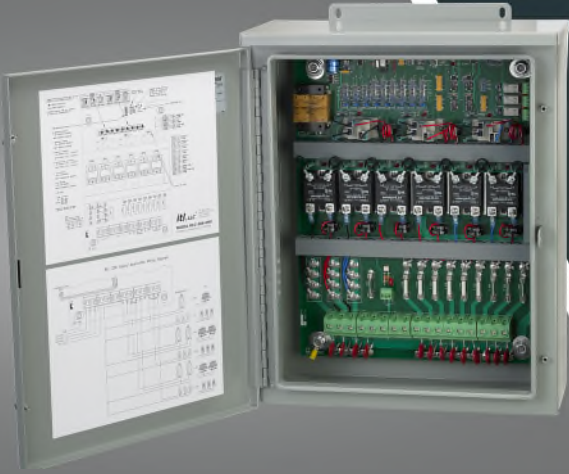

The **RLC-206 LED/Incandescent Alarmed Red Light Controller** is a complete control solution for type A-3 towers.

## Features

- Controls six L-864 LED or incandescent beacons and three levels of up to five L-810 LED or incandescent markers.
- Compact lockable NEMA 3R Enclosure (22.25 x 16.50 inches overall).
- Manual mode control switch.
- Indicator lights for alarms, operating mode and flash command.
- Built-in fusing for beacons, each marker level, and photoelectric cell (PEC).
- Alarm relays indicate failure of lamp, flasher, marker, PEC and Power Fail.
- Mode relay indicates day or night mode operation.
- 120 VAC and 230 VAC International versions available.

## Specifications

Beacons:	Four (4), Five (5) or Six (6 ) Incandescent Beacons <ul style="list-style-type: none"><li>- Two 620 W / 120 VAC lamps; or</li><li>- Two 700 W / 230 VAC lamps.</li></ul>
	Four (4), Five (5) or Six (6 ) <ul style="list-style-type: none"><li>- ITL IFH-1700-000; or</li><li>- Dialight D464 series LED Beacons; or</li><li>- Dialight D264 series LED Beacons.</li></ul>
Markers:	Two (2) or three (3) levels (up to five (5) per level) <ul style="list-style-type: none"><li>- 116 W / 120 VAC Incandescent; or</li><li>- 100 W / 230 VAC Incandescent; or</li><li>- ITL MKR-ILED-1DH; or</li><li>- Other 7 W LED marker lights.</li></ul>
Alarm Relays:	120 / 230 VAC, 1 Amp
PEC:	120 / 230 VAC, 50 / 60 Hz, 1 VA
Suppression:	70 Joule, 130 V, Pwr, Bcn, Mkr, PEC 23 Joule, 275 V, All alarm relays
Enclosure:	NEMA Type 3R, Lockable
Power:	120 / 230 VAC, 50/60 Hz, 12 VA
Temperature:	-40 °C to +55 °C
Humidity:	Less than 95%, non-condensing
Weight:	32 lbs. (14.5 kg)

