


RLC-201-UNI

Alarmed Triple Beacon
Red Light Controller

WHERE ENGINEERING
MEETS PASSION.™

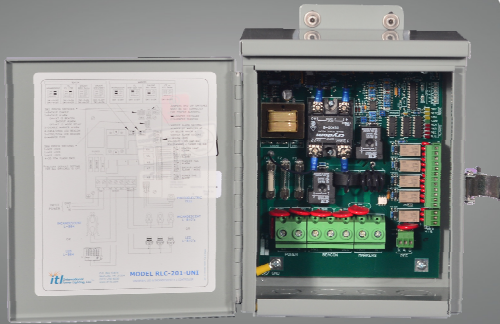

RLC-0201-UNI

DESCRIPTION

The **RLC-201 LED / Incandescent Alarmed Red Light Controller** is a complete control solution for type A-1 Towers.

Features

- Controls one L-864 LED or incandescent beacon and up to five L-810 LED or incandescent markers.
- Compact lockable NEMA 3R Enclosure (12 x 8.8 inches overall).
- Three pre-punched knockouts (1/2 inch - 1 inch).
- Manual mode control switch.
- Indicator lights for operating mode and flash command.
- Built-in fusing for beacon, markers, and photoelectric cell (PEC).
- Alarm relays indicate failure of lamp, flasher, marker, PEC and Power Fail.
- Mode relay indicates day or night mode operation.
- 120VAC and 230VAC International versions available.

Specifications

Beacon:	One Incandescent Beacon: Two 620W / 120 Vac lamps or Two 700W / 230 Vac lamps or One ITL IFH-1700 or One Dialight D564 Series LED Beacon or D464 Series LED Beacon or D264 Series LED Beacon
Markers:	Up to Five Incandescent 116W or 100W, 120 or 230 Vac Up to Five LED ITL MKR-LTE1-000, MKR-LTE1-01R or Other 7W LED marker lights
Alarm Relays:	120 / 230 Vac, 1 Amp
PEC:	120 / 230 Vac, 50 / 60 Hz, 1VA
Suppression:	45 Joule, 275V, Pwr, Bcn, Mkr, PEC 23 Joule, 275V, All alarm relays
Enclosure:	NEMA Type 3R, Lockable
Power:	120 / 230 Vac, 50/60 Hz, 6VA
Temperature:	-40°C to +55°C
Humidity:	Less than 95%, non-condensing
Weight:	8lbs. (3.6kg)

