


The **MON-830 Enhanced Tower Lighting Monitoring System** is available pre-configured and cabled for your specific tower lighting system. The MON-830 works with ITL AutoDialer Pro™ software to provide real time and historical reporting on your tower lighting system.




ITL AutoDialer Pro

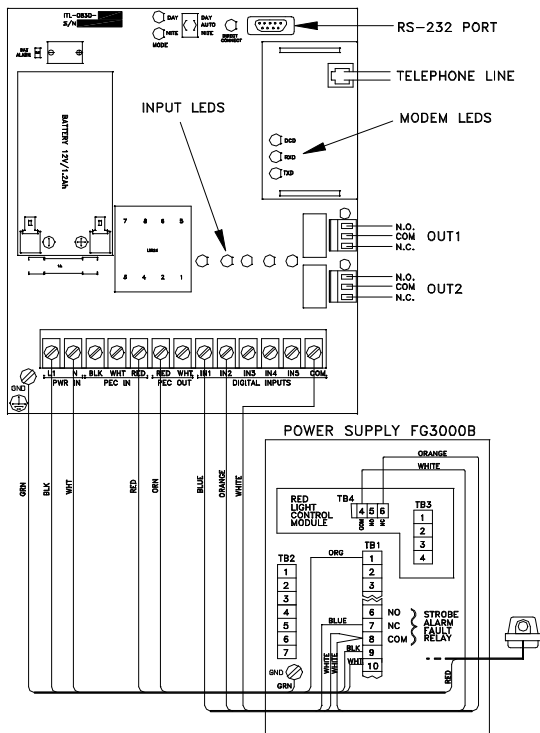

- Extensive Logging and report generation via AutoDialer Pro™ software.
- Pre-configured and cabled for ease of installation.
- 5 Dry contact inputs and two Form-C relay outputs.
- Field replaceable modem module.
- Remote Day/Night Mode control.
- LED Indicators for all input/output activity.
- Remote viewing of alarm conditions via password protected modem dial-in.
- Battery backup.
- RS-232 Serial port for on-site diagnostics.

## Specifications

Enclosure:	NEMA Type 3R, Lockable
Power:	120 / 230 VAC, 50/60 Hz, 6VA
Temperature:	-40°C to +55°C
Humidity:	Less than 95%, non-condensing
Weight:	11 lbs. (5 Kg)
Suppression:	45 Joule, 275V, Input Power 23 Joule, 275V, All Alarm Relay Contacts 23 Joule, 150V, Modem
Modem:	FCC Part 68 Approved.
Alarm Relays:	120 / 230 VAC, 1 Amp

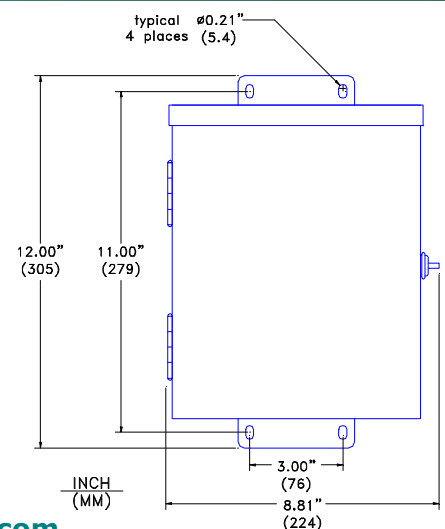

Visit us on the internet at [www.itl-llc.com](http://www.itl-llc.com)