


# MON-830

## Dial-Up Tower Lighting Monitoring System

Visit our website: [www.itl-llc.com](http://www.itl-llc.com)

The **MON-830 Enhanced Tower Lighting Monitoring System** is available pre-configured and cabled for your specific tower lighting system. The MON-830 works with ITL AutoDialer Pro™ software to provide real time and historical reporting on your tower lighting system.

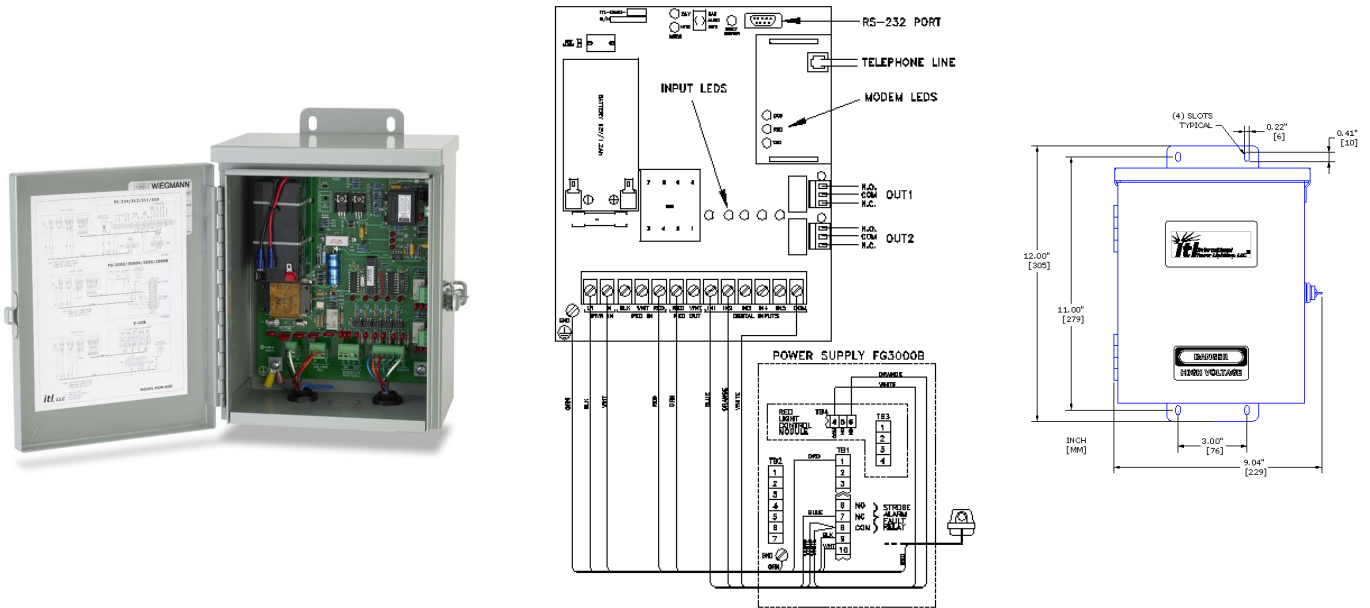

### Features

- Extensive Logging and report generation via AutoDialer Pro™ software.
- Pre-configured and cabled for ease of installation.
- 5 Dry contact inputs and two Form-C relay outputs.
- Field replaceable modem module.
- Remote Day/Night Mode control.
- LED Indicators for all input/output activity.
- Remote viewing of alarm conditions via password protected modem dial-in.
- Battery backup.
- RS-232 Serial port for on-site diagnostics.

### Specifications

- Enclosure: NEMA Type 3R, Lockable
- Power: 120 / 230 VAC, 50/60 Hz, 6VA
- Temperature: -55°C to +55°C
- Humidity: Less than 95%, non-condensing
- Weight: 11 lbs. (5 Kg)
- Suppression: 45 Joule, 275V, Input Power  
23 Joule, 275V, All Alarm Relay Contacts  
23 Joule, 150V, Modem
- Modem: FCC Part 68 Approved.
- Alarm Relays: 120 / 230 VAC, 1 Amp



P.O. Box 41875 Nashville, TN 37204 USA  
Phone: +1 (615) 256-6030 Toll Free: +1 (866) 624-8309 Fax: +1 (615) 256-6032  
Copyright © 2002 - 2015, Revision 3

