


MON-950

SNMP Enabled
Monitoring System

Visit our website: www.itl-llc.com

The **MON-950 SNMP Enabled Monitoring System** can utilize direct wired Ethernet or wireless cellular communication technology to provide monitoring of tower lighting systems. The **MON-950** works with your **SNMP** manager software to provide real-time and historical reporting on tower lighting systems. Supports virtually all existing medium intensity lighting systems and is easily adaptable to new systems.

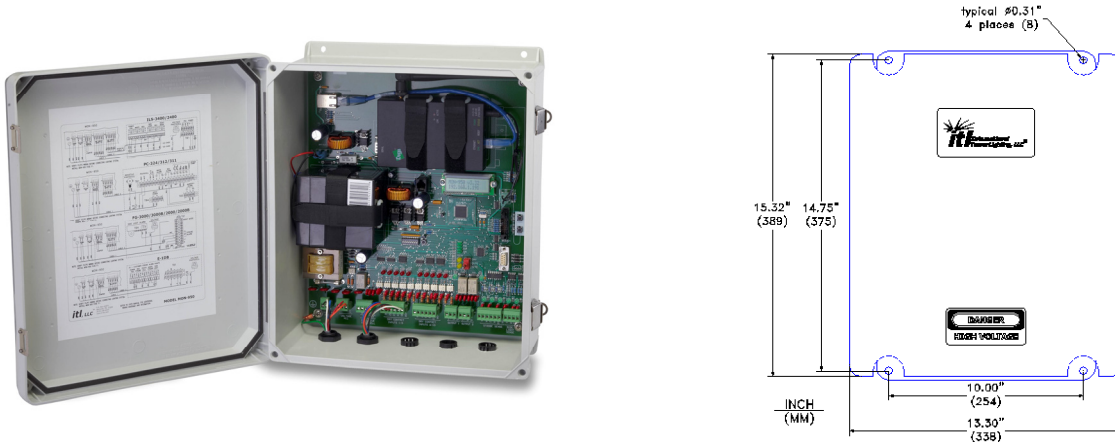

Features

- SNMP V1 enabled.
- Supports direct Ethernet and cellular modems for connectivity.
- Supports 4GLTE and 3G cellular modems from Digi International.
- Capable of monitoring triple-beacon systems for towers over 350 ft .
- Remote Day/Night Mode control.
- 10 Dry contact inputs and 2 form-C relay outputs.
- Easy to use web browser interface for system configuration.
- LED indicators for all input/output activity.
- Remote viewing of site status via secure wireless communications.
- Battery backup capability and battery included.

Specifications

- Enclosure: NEMA 4X, Lockable
- Power: 120 VAC, 60 Hz, 12VA (max)
24 VDC Option Available
- Temperature: -40°C to +55°C
- Humidity: Less than 95%, non-condensing
- Weight: 14 lbs. (6.4Kg)
- Suppression: 45 Joule, 275V, Input Power, Photocell
23 Joule, 275V, Dry Contact Inputs
23 Joule, 150V, Relay Outputs
- Relay Outputs: 120 / 230 VAC, 1 Amp, Form-C
- Modems: Supports Digi WR21 and Digi Connect
WAN cellular modems (4GLTE & 3G)
Modems Sold separately.

