


MON-9600-000

Universal Monitoring System

WHERE ENGINEERING
MEETS PASSION.™

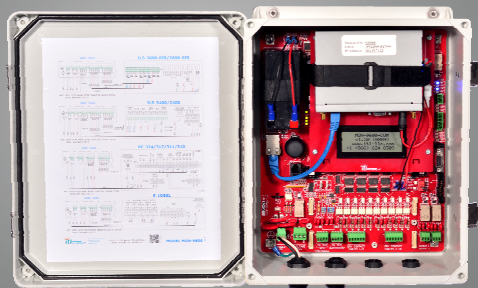

MON-9600-000

DESCRIPTION

ITL's **MON-9600-000** is designed to provide a universal monitoring solution. This monitoring system can be configured to monitor any lighting controller or generator using existing alarm contacts as well as advanced monitoring of ILS-2600/3600 and ILS-D1RW lighting systems. With the addition of a pluggable board the system will be able to expand its monitoring capabilities for many applications and technologies. All MON-9600-000 controllers are SNMP enabled and support both, SNMP v1 and SNMP v2c capabilities to allow for M2M communication. Additionally, the system has built-in web pages to provide a more intuitive human interface and is supported by all major web browsers. Support for ADP™ is provided as well. Both, hardwired Ethernet connection and wireless modem communication are also fully supported.

Typical wireless applications include the use of a secure software tunnel provided by a third party for communication between the MON-9600 (Agent) equipment and network management system (NMS) or SNMP manager.

Features

- SNMP v1/v2c enabled.
- Supports Ethernet and cellular modems for connectivity.
- Supports 4GLTE and 3G modems.
- Remote Day/Night Mode override control.
- GPS location capabilities. (Antenna Required)
- Internal temperature sensing.
- Expansion to 20 dry contact inputs available.
- Two Form-C relay output for general purpose use such as cycling a backup generator.
- Included LCD display for onsite diagnostics.
- Easy to use web browser interface for system configuration.
- LED indicators for all system activity.
- Remote viewing of site status via secure wireless communications.
- Battery backup capability and battery included

Specifications

Enclosure:	NEMA 4X, Lockable
Power:	120 VAC, 60 Hz, 12VA (max) 12-48VDC (Option Available)
Temperature:	-40°C to +55°C
Humidity:	Less than 95%, non-condensing
Weight:	10 lbs. (4.5Kg)
Suppression:	45 Joule, 275V, Input Power 23 Joule, 275V, Spare Relay
Spare Output Relay:	120 / 230 VAC, 1 Amp, Form-C
Modems:	Supports Digi WR21, Digi WR11 and Digi Connect WAN modems (4G LTE & 3G) Modems Sold Separately

