


RLC-200-UNI

Alarmed Obstruction
Light Controller

WHERE ENGINEERING
MEETS PASSION.™

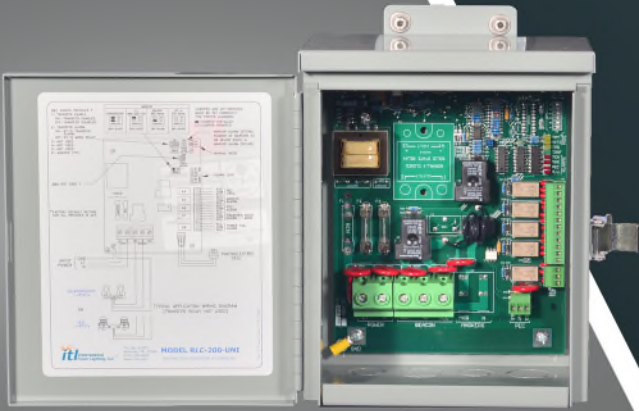

The **RLC-200-UNI LED/Incandescent Alarmed Red Light Controller** is a complete control solution for type A-0 Towers.

Features

- **Controls and monitors up to 5 L-810 single obstruction lights.**
- Compact lockable NEMA-3R Enclosure (12 x 8.8 inches overall).
- Three pre-punched knockouts (1/2 inch - 1 inch).
- Manual mode control switch.
- Built-in fusing for obstruction lights and photoelectric cell (PEC).
- Main alarm relay indicates failure of obstruction light, or PEC.
- Individual alarm relays for obstruction light alarm, PEC alarm and backup mode.
- Transfer relay included.
- 120 VAC and 230 VAC International versions available.

Specifications

Obstruction:	Up to 5 Incandescent
Lights:	116 W / 120 VAC lamps or 100 W / 230 VAC lamps or Up to 5 LED ITL MKR-ILED-1DH or Other 7 W LED marker lights
PEC:	120 / 230 VAC, 50 / 60 Hz, 1 VA
Alarm Relays:	120 / 230 VAC, 1 Amp
Suppression:	45 Joule, 275 V, Power, Lights, PEC 23 Joule, 275 V, Alarm relays
Enclosure:	NEMA Type 3R, Lockable
Power:	120 / 230 VAC, 50/60 Hz, 6 VA
Temperature:	-40°C to +55°C
Humidity:	Less than 95%, non-condensing
Weight:	8 lbs. (3.6 kg)

